



### Features

- ◆ Intel® Bay Trail-M Processors
- ◆ Onboard 2GB DDR3L Memory
- ◆ Support Two Independent Display, HDMI+VGA
- ◆ 1 x mSATA
- ◆ 1 x USB3.0 , 3 x USB2.0
- ◆ 1 x RJ45, 1 x Mini-PCle for WiFi/BT



### Specifications

RoHS CE FC CCC

F202

		F202
Processor	CPU	Intel® Celeron N2807
	Frequency	1.58 GHz (Up to 2.16 GHz)
	BIOS	AMI Source Code
	Chipset	SOC
Memory	Type	DDR3L-1333MHz
	Socket	Onboard
	Max Size	2GB
Graphics	GPU	Intel® HD Graphics
	Graphic Engine	DirectX 11.1, OpenGL 3.0, OpenCL 1.1, OpenGL ES 2.0
	HDMI	1 x HDMI (Max. 1920 x 1080@60Hz)
	VGA	1 x VGA (Max. 2560 x 1600@60Hz)
Network	Controller	Realtek RTL8111F Gigabit Ethernet
	Interface	1 x RJ45
I/O	USB	1 x USB 3.0, 3 x USB 2.0
	Display Interface	1 x HDMI, 1 x VGA
	LAN	1 x RJ45
	Audio	1 x MIC-IN, 1 x AUDIO OUT
	Mini-PCle#1	1 x Full-size Mini-PCle for mSATA
	Mini-PCle#2	1 x Full-size Mini-PCle for WiFi/BT
	JAHG Switch	1
	LED Indicators	1 x HDD LED, 1 x Power LED
Storage	mSATA	1 x Full-size Mini-PCle for mSATA
JAHG Tech	WatchDog Timer	0~255 Second Time Out Support
	Auto Power On	Power Activated Automatically Start
	RTC	Set Up Independently Every day, A Week as a Cycle
Operation System	Windows	Windows 7/8.1/10
	Linux	Supported
Power	Power Type	DC-IN
	Input Voltage	12V

		F202
Mechanical	Dimensions (W x D x H)	116.6mm x 107.2mm x 30mm
	Fanless	Yes
	Construction	Metal
	Mounting (Optional)	Desk/Wall Mounting and VESA Mounting Kit (JT NUC-JC530)
	Color	Black
Environment	Operating Temperature	0°C ~ 40°C ( 32 °F ~ 104 °F ) at 0.7m/s Air Flow
	Relative Humidity	95% @ 40°C (non-condensing)
Certification	Certification	CE, FCC Class B, CCC

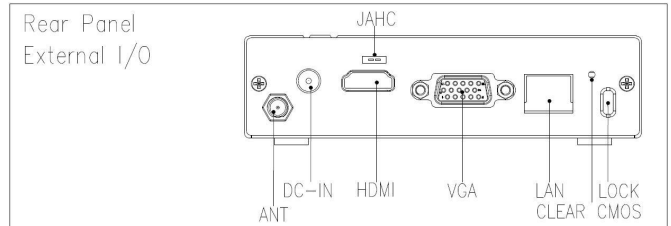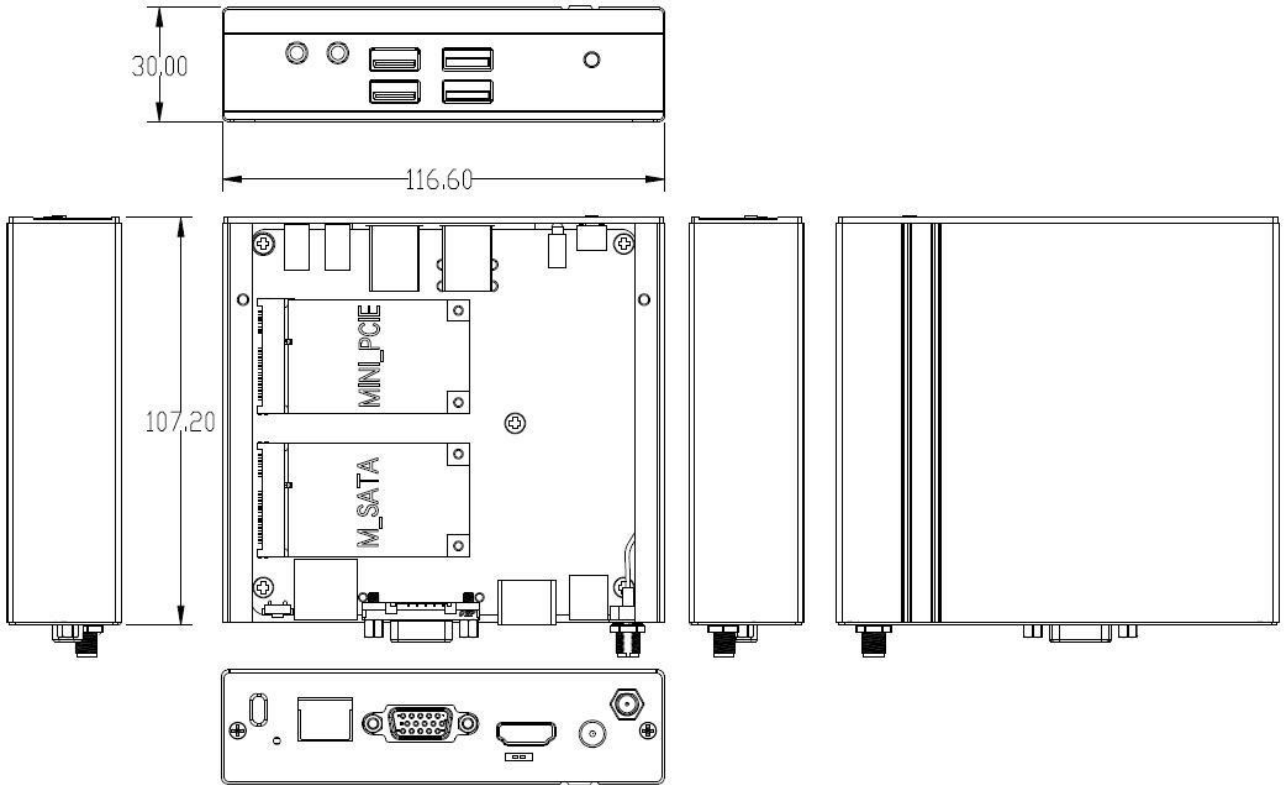

The product appearance, specifications and features are subject to change. Giada reserves the right of final interpretation for the content hereinabove.

versions: v2