



#### Features






- ◆ Intel® Kabylake Processors
- ◆ 2 x SO-DIMM DDR4/DDR3L, Up to 32GB
- ◆ 1 x DP, 1 x HDMI, Supporting 4K Display
- ◆ 1 x 2.5" SATA, 1 x mSATA, 1 x M.2(2242/2280) for SSD
- ◆ 3 x USB3.0, 3 x USB2.0, 1 x RS232
- ◆ 1 x RJ45, 1 x Mini-PCIe for WiFi/BT/3G/4G, 1 x SIM Slot

#### Specifications

RoHS CE FC CCC

		D67-N1	D67-N2	D67-N1	D67-N2	D67-N2
Processor	CPU	Intel® Core i3-7100U		Intel® Core i5-7200U		Intel® Pentium 4415U
	Frequency	2.40 GHz		2.50 GHz (Up to 3.10 GHz )		2.30 GHz
	BIOS	AMI Source Code				
	Chipset	SOC				
Memory	Type	DDR4	DDR3L	DDR4	DDR3L	DDR3L
	Socket	2 x SO-DIMM				
	Max Size	32GB				
Graphics	GPU	Intel® HD Graphics 620				
	Graphic Engine	Direct3D 2015, OpenGL 5.0, OpenCL 2.1				
	DP	1 x DP (Max. 4096 x 2304 @60Hz)				
	HDMI	1 x HDMI (Max. 3840 x 2160 @30Hz)				1 x HDMI (Max. 4096 x 2304 @24Hz)
Network	Controller	Realtek 8111F Gigabit Ethernet				
	Interface	1 x RJ45				
I/O	USB	3 x USB 3.0, 3 x USB 2.0				
	Display Interface	1 x DP, 1 x HDMI				
	LAN	1 x RJ45				
	Serial Port	1 x RS232				
	Audio	1 x MIC-IN, 1 x AUDIO-OUT				
	Mini-PCIe #1	1 x Full-size Mini-PCIe for mSATA				
	Mini-PCIe #2	1 x Full-size Mini-PCIe for WiFi/BT/3G/4G				
	M.2	1 x M.2 (2242/2280) for SSD				
	SIM	1 x SIM Slot				
	JAHC Switch	1				
Storage	LED Indicators	1 x HDD LED, 1 x Power LED				
	SATA	1 x 2.5" SATA				
	mSATA	1 x Full-size mSATA				
JAHC Tech	M.2	1 x M.2 (2242/2280) for SSD				
	WatchDog Timer	0~255 Second Time Out Support				
	Auto Power On	Power Activated Automatically Start				
Operation System	RTC	Set Up Independently Every day, A Week as a Cycle				
	Windows	Windows 7/8.1/10 (64-bit)				
	Linux	Supported				

Power	Power Type	DC-IN
	Power Adapter	19V/3.42A
Mechanical	Dimensions (W x D x H)	189.6mm x 148.3mm x 26mm
	Construction	Metal
	Mounting(Optional)	Desk/Wall Mounting and VESA Mounting Kit (JZ183)
	Color	Black
Environment	Operating Temperature	0°C ~ 40°C ( 32 F ~ 104 F ) at 0.7m/s Air Flow
	Relative Humidity	95% @ 40°C (non-condensing)
Certification	Certification	CE, FCC Class B, CCC

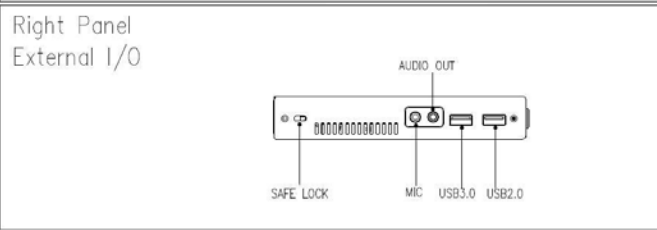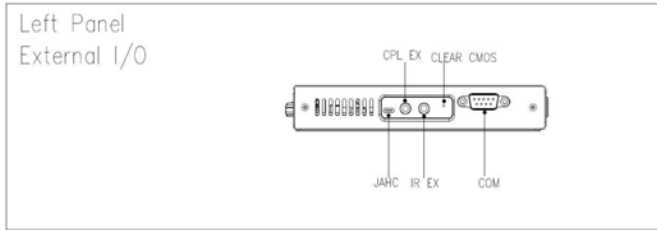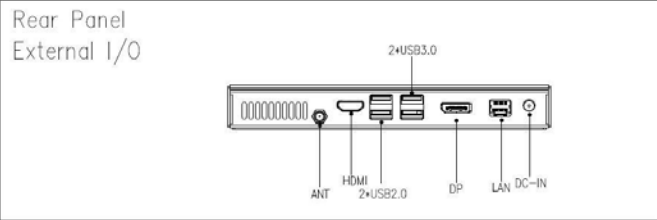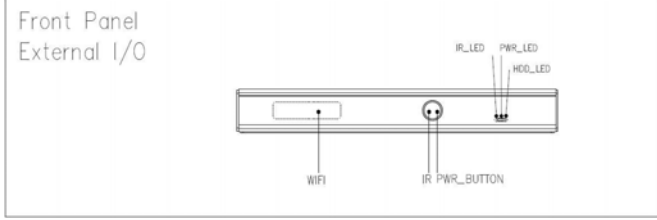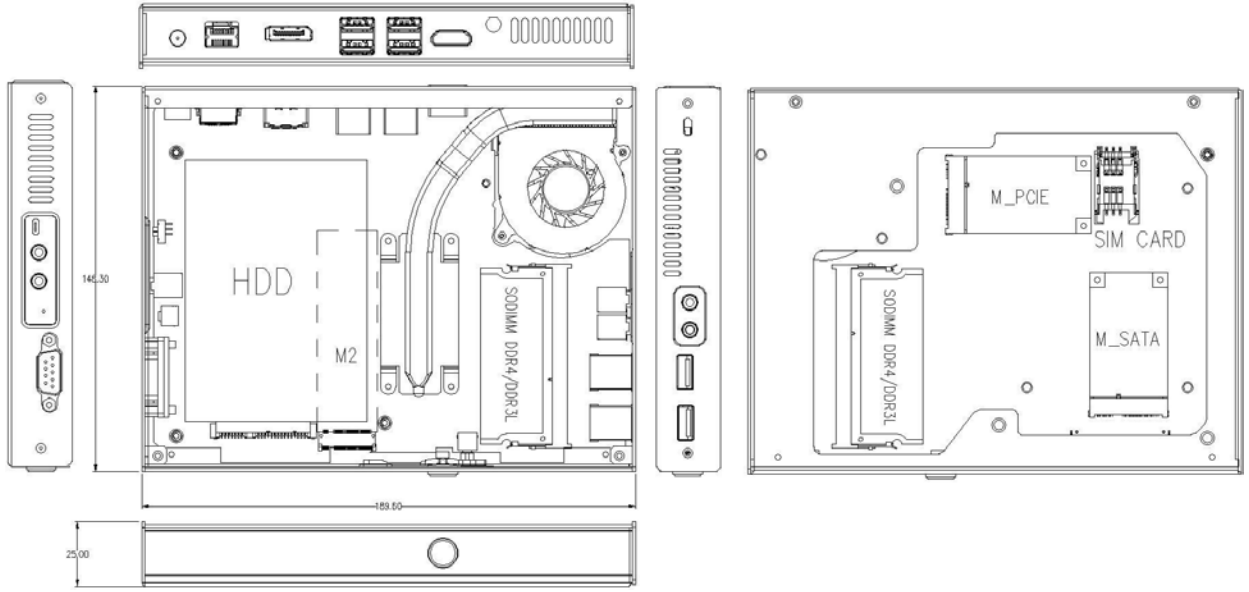

The product appearance, specifications and features are subject to change. Giada reserves the right of final interpretation for the content hereinabove.

versions: v2