



Features

- ◆ Intel® Pentium 4415U
- ◆ 2 x SO-DIMM DDR3L-1600MHz, Up to 32GB
- ◆ 2 x DP, 1 x HDMI
- ◆ 1 x 2.5" SATA, 1 x mSATA
- ◆ 2 x USB3.0, 2 x USB2.0, 1 x RS232
- ◆ 1 x RJ45, 1 x Mini-PCle for WiFi/BT/3G/4G, 1 x SIM Slot




Specifications

RoHS CE FC CCC

G367-P

		G367-P
Processor	CPU	Intel® Pentium 4415U
	Frequency	2.30 GHz
	BIOS	AMI Source Code
	Chipset	SOC
Memory	Type	DDR3L-1600MHz
	Socket	2 x SO-DIMM
	Max Size	32GB
Graphics	GPU	NVIDIA GT730, SDDR3 2GB
	Graphic Engine	DirectX12, OpenGL4.4 and OpenCL 1.2
	HDMI	1 x HDMI (Max. 4096 x 2304 @24Hz)
	DP	2 x DP (Max. 4096 x 2304 @60Hz)
Network	Controller	Realtek RTL8111H Gigabit Ethernet
	Interface	1 x RJ45
I/O	USB	2 x USB 3.0, 2 x USB2.0
	Display Interface	2 x DP1.2, 1 x HDMI1.4b
	LAN	1 x RJ45
	Serial Port	1 x RS232
	Audio	1 x MIC-IN, 1 x AUDIO-OUT & SPDIF
	Mini-PCle1#	1 x Full-size Mini-PCle for mSATA
	Mini-PCle2#	1 x Full-size Mini-PCle for WiFi/BT/3G/4G
	M.2(2230)	1 x M.2 (2230) for WiFi/BT
	SIM	1 x SIM Slot
LED Indicators	1 x HDD LED, 1 x Power LED	
Storage	SATA	1 x 2.5" SATA
	mSATA	1 x Full-size mSATA
JAHC Tech	WatchDog Timer	0~255 Second Time Out Support
	Auto Power On	Power Activated Automatically Start
	RTC	Set Up Independently Every day, A Week as a Cycle
	Remote Control	By IR Controller for Power On
Operation System	Windows	Windows 10 (64-bit)
	Linux	Supported

		G367-P
Power	Power Type	DC-IN
	Input Voltage	12V/19V
Mechanical	Dimensions (W x D x H)	240mm x 175mm x 28 mm
	Construction	Metal
	Mounting (Optional)	Wall Mounting and VESA Mounting (JZ300)
	Color	Black
Environment	Operating Temperature	0°C ~ 40°C (32 °F ~ 104 °F) at 0.7m/s Air Flow
	Relative Humidity	95% @ 60°C (non-condensing)
Certification	Certification	CE, FCC Class B, CCC

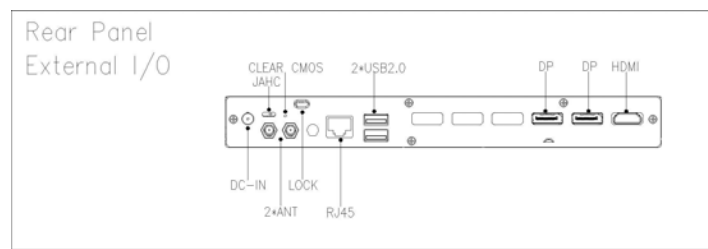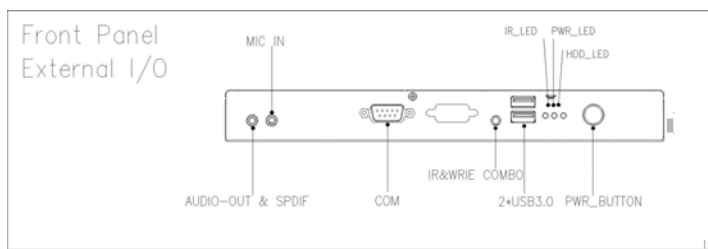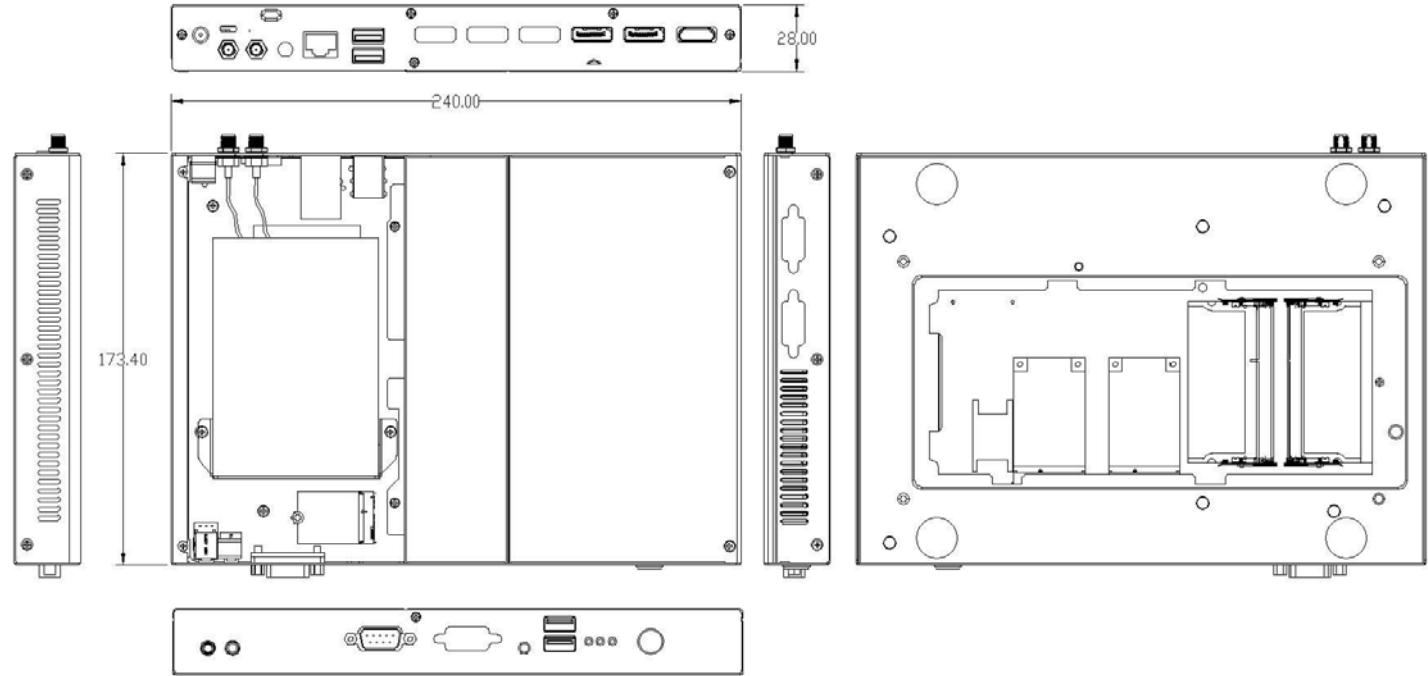

The product appearance, specifications and features are subject to change. Giada reserves the right of final interpretation for the content hereinabove.

versions: v2