

Smart Desktop Terminal

SUNMI T3 Family – T3 ^{New}

Power meets elegance at your counter.

Powered by
SUNMI OS

Compatible with
SUNMI DMP



- **New platform to unleash powerful performance.**

Enjoy a 20% performance boost, with a Qualcomm octa-core processor offering a clock speed up to 2.4GHz and built with a 6nm process technology, along with 4GB RAM+64GB ROM of robust memory.

- **Sleek Z shape. Consistent excellence in design.**

The standout Z-shaped design offers elegance from every angle. A metal die-casting process provides a slim yet sturdy body. The hidden cable system keeps your workspace organized and clutter-free.

- **Enhanced user experience with new features.**

Triple displays provide versatile content presentation and seamless multi-screen integration. The NFC readers on two sides of the screen simplify membership management. The power button features fingerprint recognition for instant unlocking and secure app access.

**Elegant design,
consistent style.**



Powered by Qualcomm

**20%
Performance boost.**



*Data from SUNMI Lab.


**Triple the content you
want to display.**



**Use CPad PAY
as a secondary display.**



**Expanded interface
design.**

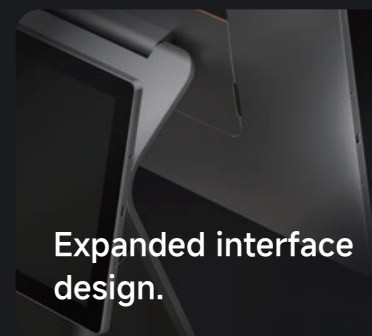

SUNMI T3 Application Scenario



Boutique Store




Bar Counter



Café

SUNMI T3 Tech Specs

CPU Octa-core, up to 2.4GHz	OS SUNMI OS 4.0 (Based on Android 13)	Memory 4GB RAM + 64GB ROM Extended Micro SD Card Slot Up to 2TB	Displays 15.6" FHD, 1920*1080 Pixels, IPS Capacitive Multi-touch Screen, Anti-fingerprint Coating	GMS Supported (Optional)
Buttons 1*Power button 1*Volume button (hidden)	Card Slots 1*Micro SIM (4G Version) 1*Micro SD	Interface 3*USB 2.0 Type-A 1*USB 3.0 Type-A 1*USB Type-C 2*Micro USB 1*Micro USB debug 1*RJ45 1*RJ11 1*RJ12 1*DC	Cellular 4G/3G (Optional)	Wi-Fi 5GHz/2.4GHz IEEE 802.11 a/b/g/n/ac
Bluetooth Bluetooth 5.0, Support BLE	Positioning GPS/Glonass/Beidou/ Galileo (4G Version)	Cameras 5MP FF Front Camera	NFC Tap on screen	Fingerprint Supported
Audio 2*2W Speaker 1*Microphone	Sensors Gravity sensor	Adapter Input: 100~240V AC Output: 24V/2.5A DC	Net Weight 3kg	Gross Weight 5.5kg
Environment Operating Temperature: 0°C~40°C Storage Temperature: -20°C~60°C Operating Humidity: 5% to 95% non-condensing	Accessories (Optional) 15.6" separate monitor: FHD 1920*1080, capacitive multitouch display 10.1" separate monitor: HD 1280*800, capacitive multitouch display MSR Card Reader Cash drawer mount Elevated rubber feet		Dimensions(L*W*H) 373*176*314 mm 	

*This product description is based on the current information available at the time of launch. Due to product upgrades or other reasons, the content may change. The company reserves the right to modify the product and content without prior notice.